


Biltmore

Edition: 21/03/2013

COMPOSITION

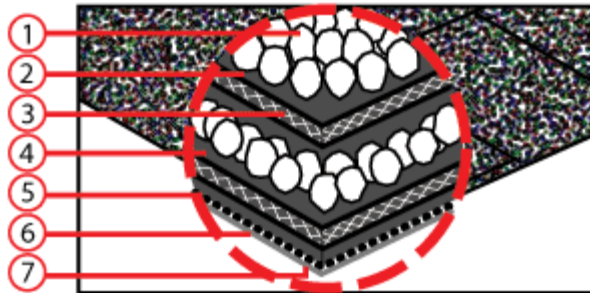

1. Coloured granules
2. Top coating oxidized bitumen
3. Saturated glass mat
4. Back coating oxidized bitumen
5. Fine mineral
6. Self sealing dots
7. Anti adhesive strip


FIELD APPLICATION

Roofing material for commercial and Residential constructions with a roof pitch between 15° and 85°.

COLOURS

- | | |
|------------------------|---------------------|
| 48 Forest Green | 49 Earhthone Cedar |
| 50 Harvard Slate Ultra | 52 Dual Black Ultra |
| 53 Dual Brown Ultra | 54 Aged Redwood |
| 55 Riviera Red | |

DIMENSIONS

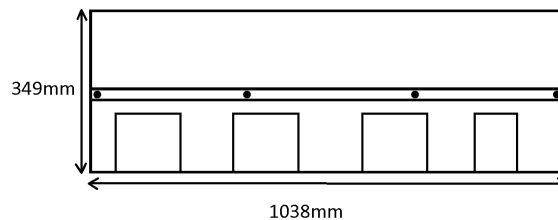

Length	1038 mm (+/- 3)
Width	349 mm (+/- 3)
Weight	+/- 11,6 kg/m ²
Coverage/bundle	3,1 m ²
Schingles/bundle	20
Bundles/palet	45

TECHNICAL INFORMATION

	<i>Tensile strength</i>		<i>Elongation</i>		<i>Nail tear</i>
	<i>Length</i>	<i>Width</i>	<i>Length</i>	<i>Width</i>	
<i>Minimum</i>	≥ 600N	≥ 400N	≥ 2,5%	≥ 2,5%	≥ 100N

Granule adhesion

Max. 1,2gr/m²